


Surveillance Series

High Resolution Network Camera

GCB3510P

Key Feature

- High Quality video Resolution of 3 Megapixel
- Smart IR Feature
- 3.6mm Fixed Lens
- Wide Dynamic Range Function
- H.265 Video Compression Format
- 15M IR Distance

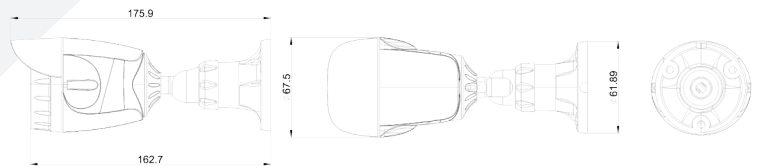

Specifications

VIDEO	
Imaging Device	1/2.8" SONY Exmor 3.0 Megapixel Progressive CMOS Sensor
Video Frame Rate	2048x1536@25fps
Min. Illumination	Color:0.02Lux@F1.2, B/W:0.005Lux@F1.2, IR On:0Lux@F1.2
Mechanical IR Cut (ICR)	Automatically Switches
Audio	N/A
IR Distance	15m (Smart IR, According to range of object to avoid IR exposure)
LENS	
Focal Length	F3.6mm
Lens Adapter	Built-in Fixed Lens
Mount Type	On Board
Min. Object Distance	0.2m
Lens Type	DC auto iris
OPERATIONAL	
On Screen Display	English, Chinese
Day & Night	Color / B&W / Auto
WDR ; BLC	WDR / BLC / HLC
Motion Detection	On / Off
Privacy Masking	On / Off
Image Setting	Saturation / Brightness / Contrast / Sharpness / Mirror / Flip
White Balance	ATW / AWB / PWB(Push Lock) / Manual
Electronic Shutter Speed	Auto :1/25(30)~1/30,000s
NETWORK	
Ethernet	RJ-45 (10/100Base-T)
Video Compression Format	H.265, H.264, MPEG4, M-JPEG
Bit Rate	CBR or VBR or EVBR
Protocol	IPv4, IPv6, TCP, UDP, HTTP, HTTPS, SMTP, FTP, NTP, DNS, DDNS, DHCP, DIPS, ARP, Bonjour, UPnP, RTSP, RTP, RTCP, IGMP, PPPoE, 3GPP, Samba, ICMP, SNMP, QoS, CoS, 802.1x, iSCSI
Security	Password protection, IP address filtering, HTTPS encrypted data transmission, user access log
Users	20 simultaneous unicast users
Compatibility	ONVIF
Web Viewer	Windows® 7, 8,10
ENVIRONMENTAL	
Operating Temperature	-20°C ~ 50°C
Operating Humidity	Less than 80% RH
Protection Level	IP66, IK10
ELECTRICAL	
Input Voltage	12V DC, PoE (IEEE 802.3af class 3)
Power Consumption	3W ,IR On: 7W
MECHANICAL	
Connector	RJ-45 10/100Base(PoE)
Dimensions	∅ 163 x 68(D)mm
Net Weight	300g

* Derivative products : GCB-3510P

Deutsch Sicherheit Standard
Security Camera
Network Bullet Camera

D.S.S.
Technik Für Sicherheit